

**Ultima SLM Ni-Cd battery**  
Performance with ultra low maintenance



**saft**



# Soft Nife Ultima Ni-Cd battery


## Ultra low maintenance

*Developed in line with long proven nickel-cadmium technology, Ultima is an exceptionally reliable recombination pocket plate battery incorporating special technical features.*

Delivering long life and requiring minimal maintenance, there is no better solution for installations where the risk of failure is unacceptable, as in

- UPS systems
- emergency lighting
- process control
- telecommunications.

The Ultima nickel-cadmium battery is eminently suitable for "remote" application such as in offshore and switching substation operations, where the system must be totally reliable and require the minimum of maintenance visits. It is also ideal for use in railroad signaling.

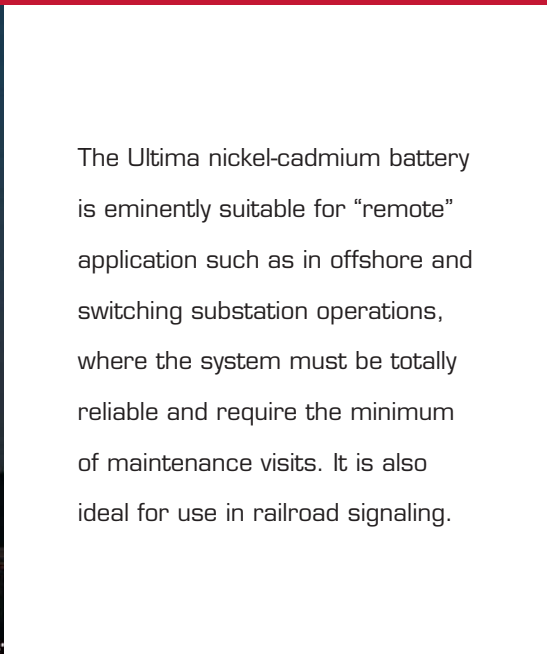



# Ultimate safety without compromise

## No water filling

No water filling is necessary during the Ultima 20-year service life because of the controlled recombination and the valve regulated venting system (topping up is possible if required).

## Valve regulated

Controlled recombination is made possible through a specific cell design and low pressure flame arresting vent. The risk of thermal runaway is eliminated by the use of free electrolyte and a recombination level of 85% to 95%, depending on floating voltage – a major advantage over VRLA batteries where starved electrolyte is often the cause of failure.

## The benefits of Ni-Cd

Ni-Cd pocket plate technology eliminates all risk of sudden death during the battery's exceptionally long service life.

Ultima is resistant to electrical and physical abuse.

With fast recharging and extended storage, the unit is not only simple to install but is also environmentally safe.

## Performance in temperature extremes

Ultima operates with total reliability over a wide temperature range: 0°C to +40°C (+32°F to +104°F) and exceptionally from -50°C to +70°C (-58°F to +158°F).

## Designed to be durable


Ultima's tough cell container cradles the battery's positive nickel hydroxide and negative cadmium hydroxide plates, and alkaline electrolyte. Optimum performance is delivered without compromising structural integrity. These active materials are contained in pockets formed from double perforated steel strips. After being mechanically linked, cut to size, compressed to final plate dimensions and welded to a current carrying bus bar assembly, the heart of the nickel-cadmium cell is formed.

## Quality built, quality tested

Ultima is manufactured in Sweden at Oskarshamn, one of Saft's many internationally accredited ISO 9001 sites.

Highest quality materials and rigorous quality checking procedures ensure all relevant international standards are met including IEC 60623 and 62259.

Ultima has been developed in line with the safety requirements of EN 50272-2, and components used (such as insulated cable connectors and end lug covers) are defined to ensure high protection against electric shocks (IP2 level).

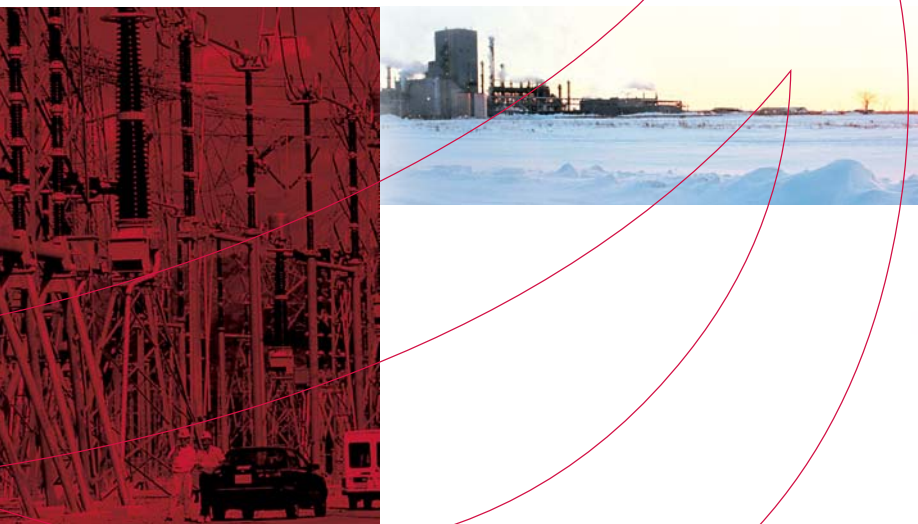

# Physical properties and block configurations


## Flexibility of charging

Charging may be quickly and simply carried out by either double or single level methods


- for two level charge:
  - float level:  $1.42 \pm 0.01$  V/cell
  - high level:  $1.45 \pm 0.01$  V/cell
- for single level charge:
  - $1.42 \pm 0.01$  V/cell

Alternatively, a float charge of  $1.42 \pm 0.01$  V/cell brings Ultima to up to 80% capacity after only 16 hours from a fully discharged state.

## Effect of charging voltage on water consumption

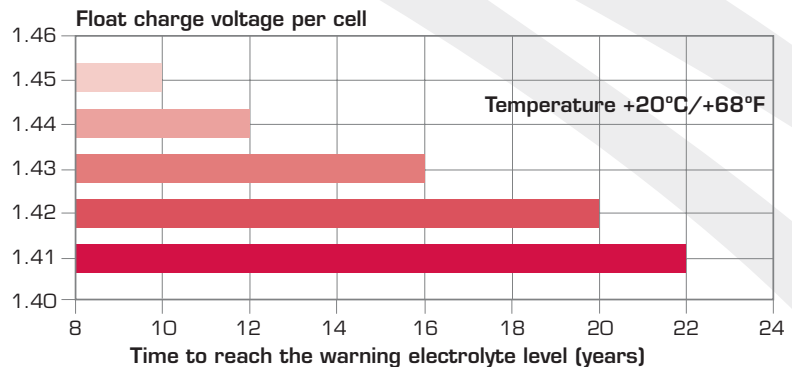


## Typical de-rating factors versus temperature for cell final voltage between 1.00 volts and 1.10 volts

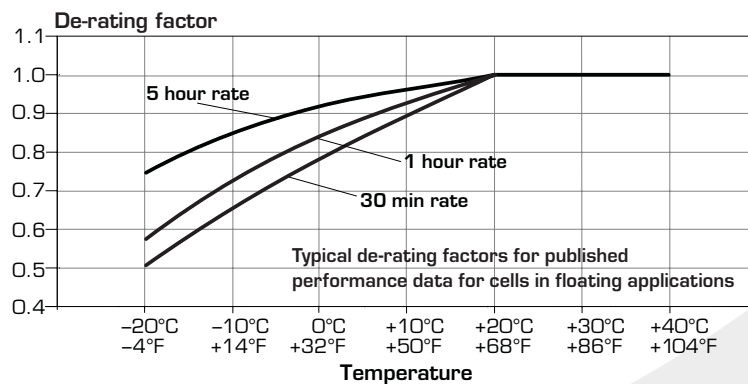

## Block configuration


For serial connection of blocks on racks or on shelves, always use blocks with an even number of cells. This gives short, straight interblock connectors. When a block with an odd number of cells is necessary, it should be placed at the end of a cell row.

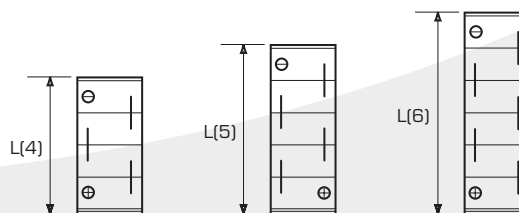

SLM 8 - SLM 48 Blocks of cells with single pole bolts.



SLM 71 - SLM 142 Blocks of cells with single pole bolts.


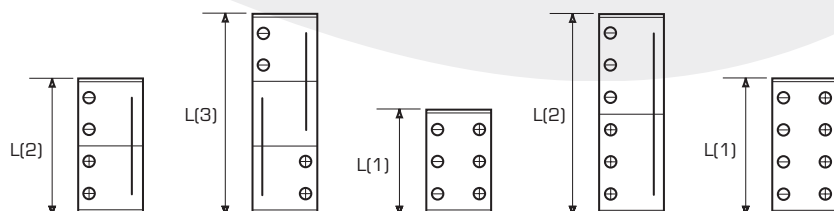


SLM 166 - SLM 476 Blocks of cells with 2 - 4 pole bolts per pole.

# Engineered for ultimate reliability



Ultima type	Voltage V	Rated capacity C <sub>s</sub> Ah	Dimensions						Approx. weight per block		Cell connection bolt per pole	Electrolyte reserve per cell cc
			mm	L in	mm	W in	mm	H in	kg	lb		
SLM 8-4	4.8	8	133	5.24	123	4.84	270	10.63	5.5	12.1	M6	48
SLM 8-5	6	8	162	6.38	123	4.84	270	10.63	6.8	15.0	M6	48
SLM 8-6	7.2	8	191	7.52	123	4.84	270	10.63	8.1	17.9	M6	48
SLM 16-4	4.8	16	133	5.24	123	4.84	270	10.63	6.1	13.4	M6	95
SLM 16-5	6	16	162	6.38	123	4.84	270	10.63	7.6	16.8	M6	95
SLM 16-6	7.2	16	191	7.52	123	4.84	270	10.63	9.1	20.1	M6	95
SLM 24-4	4.8	24	153	6.03	123	4.84	270	10.63	7.3	16.1	M6	145
SLM 24-5	6	24	187	7.36	123	4.84	270	10.63	9.0	19.9	M6	145
SLM 24-6	7.2	24	221	8.70	123	4.84	270	10.63	10.7	23.6	M6	145
SLM 32-4	4.8	32	201	7.91	123	4.84	270	10.63	10.0	22.1	M6	190
SLM 32-5	6	32	247	9.72	123	4.84	270	10.63	12.4	27.3	M6	190
SLM 32-6	7.2	32	293	11.54	123	4.84	270	10.63	14.8	32.6	M6	190
SLM 40-4	4.8	40	249	9.80	123	4.84	270	10.63	12.3	27.1	M6	240
SLM 40-5	6	40	307	12.08	123	4.84	270	10.63	15.3	33.7	M6	240
SLM 40-6	7.2	40	365	14.37	123	4.84	270	10.63	18.3	40.4	M6	240
SLM 48-4	4.8	48	249	9.80	123	4.84	270	10.63	13.7	30.2	M6	290
SLM 48-5	6	48	307	12.08	123	4.84	270	10.63	17.0	37.5	M6	290
SLM 48-6	7.2	48	365	14.37	123	4.84	270	10.63	20.3	44.8	M6	290
SLM 71-2	2.4	71	97	3.82	195	7.68	421	16.57	10.2	22.5	M8	425
SLM 71-3	3.6	71	133	5.24	195	7.68	421	16.57	14.6	32.2	M8	425
SLM 95-2	2.4	95	112	4.41	195	7.68	421	16.57	13.3	29.3	M8	570
SLM 95-3	3.6	95	155	6.10	195	7.68	421	16.57	19.4	42.8	M8	570
SLM 119-2	2.4	119	133	5.24	195	7.68	421	16.57	15.8	34.8	M10	715
SLM 119-3	3.6	119	187	7.36	195	7.68	421	16.57	23.2	51.2	M10	715
SLM 142-2	2.4	142	145	5.71	195	7.68	421	16.57	18.5	40.8	M10	850
SLM 142-3	3.6	142	205	8.07	195	7.68	421	16.57	27.0	59.5	M10	850
SLM 166-2	2.4	166	184	7.24	195	7.68	421	16.57	22.8	50.3	2 x M8	995
SLM 166-3	3.6	166	263	10.35	195	7.68	421	16.57	33.6	74.1	2 x M8	995
SLM 190-2	2.4	190	198	7.80	195	7.68	421	16.57	25.5	56.2	2 x M8	1140
SLM 190-3	3.6	190	284	11.18	195	7.68	421	16.57	37.7	83.1	2 x M8	1140
SLM 238-2	2.4	238	241	9.49	195	7.68	421	16.57	30.5	67.3	2 x M10	1430
SLM 238-3	3.6	238	349	13.74	195	7.68	421	16.57	45.3	99.9	2 x M10	1430
SLM 285-2	2.4	285	265	10.43	195	7.68	421	16.57	33.6	74.1	2 x M10	1710
SLM 285-3	3.6	285	385	15.16	195	7.68	421	16.57	49.9	110	2 x M10	1710
SLM 357-1	1.2	357	187	7.36	195	7.68	421	16.57	23.2	51.2	3 x M10	2140
SLM 357-2	2.4	357	349	13.74	195	7.68	421	16.57	45.0	99.2	3 x M10	2140
SLM 426-1	1.2	426	205	8.07	195	7.68	421	16.57	27.0	59.5	3 x M10	2555
SLM 476-1	1.2	476	241	9.49	195	7.68	421	16.57	30.2	66.5	4 x M10	2855



# Performance data

## Performance after prolonged float charge of fully charged cells

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

Final voltage: 1.00 V/cell

Ultima type	C <sub>5</sub> Ah	Hours						Minutes						Seconds			
		10	8	5	3	2	90	60	45	30	10	5	60	30	10	1	
SLM 8	8	0.8	1.0	1.6	2.6	3.8	4.7	6.1	6.9	8.0	10.9	12.2	16.2	17.9	21.1	25.5	
SLM 16	16	1.6	2.0	3.2	5.1	7.6	9.4	12.2	13.8	16.0	21.8	24.5	32.3	35.7	42.2	51.0	
SLM 24	24	2.4	3.0	4.8	7.7	11.3	14.1	18.4	20.7	24.0	32.6	36.7	48.5	53.6	63.2	76.5	
SLM 32	32	3.2	4.0	6.4	10.3	15.1	18.8	24.5	27.5	32.0	43.5	49.0	64.6	71.4	84.3	102	
SLM 40	40	4.0	5.1	8.0	12.8	18.9	23.5	30.6	34.4	40.0	54.4	61.2	80.8	89.3	105	128	
SLM 48	48	4.9	6.1	9.6	15.4	22.7	28.2	36.7	41.3	47.9	65.3	73.4	96.9	107	126	153	
SLM 71	71	7.2	9.0	14.2	23.2	33.9	41.8	54.3	61.4	70.8	94.0	100.3	123	134	153	179	
SLM 95	95	9.7	12.0	19.0	31.1	45.3	55.9	72.6	82.2	94.7	126	134	165	180	205	239	
SLM 119	119	12.1	15.0	23.8	38.9	56.8	70.0	91.0	103	119	157	168	207	225	256	299	
SLM 142	142	14.5	17.9	28.4	46.4	67.8	83.5	109	123	142	188	201	247	269	306	357	
SLM 166	166	16.9	21.0	33.2	54.3	79.2	97.6	127	144	165	220	235	288	314	358	417	
SLM 190	190	19.4	24.0	37.9	62.1	90.7	112	145	164	189	251	268	330	359	409	478	
SLM 238	238	24.3	30.0	47.5	77.8	114	140	182	206	237	315	336	413	450	513	598	
SLM 285	285	29.1	36.0	56.9	93.2	136	168	218	247	284	377	403	495	539	614	717	
SLM 357	357	36.3	45.0	71.4	117	170	210	273	309	357	471	504	621	675	768	897	
SLM 426	426	43.5	53.7	85.2	139	203	251	327	369	426	564	603	741	807	918	1071	
SLM 476	476	48.6	60.0	95.0	156	228	280	364	412	474	630	672	826	900	1026	1196	

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

Final voltage: 1.05 V/cell

Ultima type	C <sub>5</sub> Ah	Hours						Minutes						Seconds			
		10	8	5	3	2	90	60	45	30	10	5	60	30	10	1	
SLM 8	8	0.8	1.0	1.6	2.5	3.5	4.3	5.4	5.9	6.5	8.5	9.9	13.3	15.0	17.5	22.1	
SLM 16	16	1.6	2.0	3.2	5.1	7.1	8.7	10.9	11.8	12.9	17.0	19.7	26.5	29.9	35.0	44.2	
SLM 24	24	2.4	3.0	4.7	7.6	10.6	13.0	16.3	17.7	19.4	25.5	29.6	39.8	44.9	52.5	66.3	
SLM 32	32	3.2	4.0	6.3	10.1	14.2	17.3	21.8	23.7	25.8	34.0	39.4	53.0	59.8	70.0	88.4	
SLM 40	40	4.1	5.0	7.9	12.7	17.7	21.7	27.2	29.6	32.3	42.5	49.3	66.3	74.8	87.6	111	
SLM 48	48	4.9	6.0	9.5	15.2	21.2	26.0	32.6	35.5	38.8	51.0	59.2	79.6	89.8	105	133	
SLM 71	71	7.2	8.9	14.1	22.8	32.6	38.3	46.3	51.6	59.6	74.8	83.3	106	114	128	149	
SLM 95	95	9.6	11.9	18.9	30.5	43.6	51.2	61.9	69.1	79.8	100	111	142	152	171	199	
SLM 119	119	12.0	14.9	23.6	38.2	54.6	64.2	77.6	86.5	100	125	140	178	191	214	249	
SLM 142	142	14.3	17.7	28.2	45.6	65.1	76.6	92.6	103	119	150	167	213	228	255	298	
SLM 166	166	16.7	20.7	33.0	53.3	76.1	89.5	108	121	139	175	195	248	266	298	348	
SLM 190	190	19.2	23.7	37.7	61.0	87.1	102	124	138	160	200	223	284	305	341	398	
SLM 238	238	24.0	29.7	47.2	76.4	109	128	155	173	200	251	279	356	382	427	499	
SLM 285	285	28.7	35.6	56.6	91.5	131	154	186	207	239	300	334	426	457	512	597	
SLM 357	357	36.0	44.7	70.8	115	164	193	233	260	300	375	420	534	573	642	747	
SLM 426	426	42.9	53.1	84.6	137	195	230	278	309	357	450	501	639	684	765	894	
SLM 476	476	48.0	59.4	94.4	153	218	256	310	346	400	502	558	712	764	854	998	

# Performance data

## Performance after prolonged float charge of fully charged cells

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

Final voltage: 1.10 V/cell

Ultima type	C <sub>5</sub> Ah	Hours					Minutes					Seconds				
		10	8	5	3	2	90	60	45	30	10	5	60	30	10	1
SLM 8	8	0.8	1.0	1.6	2.3	3.0	3.5	4.4	4.8	5.3	6.5	7.6	10.5	11.9	14.1	17.9
SLM 16	16	1.6	2.0	3.1	4.6	5.9	7.0	8.8	9.5	10.5	13.0	15.1	21.1	23.8	28.2	35.7
SLM 24	24	2.4	3.0	4.7	6.8	8.9	10.5	13.3	14.3	15.8	19.4	22.7	31.6	35.7	42.3	53.6
SLM 32	32	3.2	4.0	6.2	9.1	11.9	14.0	17.7	19.0	21.1	25.9	30.3	42.2	47.6	56.4	71.4
SLM 40	40	4.0	5.0	7.8	11.4	14.9	17.6	22.1	23.8	26.4	32.4	37.8	52.7	59.5	70.6	89.3
SLM 48	48	4.8	6.0	9.3	13.7	17.8	21.1	26.5	28.6	31.6	38.9	45.4	63.2	71.4	84.7	107
SLM 71	71	7.1	8.8	13.8	21.5	29.0	33.5	39.2	42.7	47.2	58.3	64.6	83.3	92.7	102	111
SLM 95	95	9.5	11.8	18.4	28.8	38.9	44.8	52.4	57.2	63.1	78.0	86.4	111	124	136	149
SLM 119	119	11.9	14.7	23.1	36.0	48.7	56.1	65.6	71.6	79.1	97.7	108	140	155	171	187
SLM 142	142	14.2	17.6	27.5	43.0	58.1	67.0	78.3	85.4	94.3	117	129	167	185	204	223
SLM 166	166	16.6	20.5	32.2	50.3	67.9	78.3	91.6	100	110	136	151	195	217	238	260
SLM 190	190	19.0	23.5	36.9	57.5	77.7	89.6	105	114	126	156	173	223	248	273	298
SLM 238	238	23.8	29.5	46.2	72.1	97.3	112	131	143	158	195	217	279	311	342	373
SLM 285	285	28.5	35.3	55.3	86.3	117	134	157	171	189	234	259	334	372	409	447
SLM 357	357	35.7	44.1	69.3	108	146	168	197	215	237	293	324	420	465	513	561
SLM 426	426	42.6	52.8	82.5	129	174	201	235	256	283	351	387	501	555	612	669
SLM 476	476	47.6	59.0	92.4	144	195	224	262	286	316	390	434	558	622	684	746

Available amperes at +20°C ± 5°C (+68°F ± 9°F)

Final voltage: 1.14 V/cell

Ultima type	C <sub>5</sub> Ah	Hours					Minutes					Seconds				
		10	8	5	3	2	90	60	45	30	10	5	60	30	10	1
SLM 8	8	0.8	1.0	1.5	2.0	2.4	2.7	3.4	3.7	4.1	5.3	6.2	8.3	9.7	11.6	15.1
SLM 16	16	1.6	1.9	3.0	3.9	4.8	5.5	6.7	7.3	8.2	10.5	12.3	16.7	19.4	23.1	30.3
SLM 24	24	2.3	2.9	4.6	5.9	7.2	8.2	10.1	11.0	12.2	15.8	18.5	25.0	29.1	34.7	45.4
SLM 32	32	3.1	3.8	6.1	7.9	9.6	11.0	13.5	14.6	16.3	21.1	24.6	33.3	38.8	46.2	60.5
SLM 40	40	3.9	4.8	7.6	9.9	12.0	13.7	16.8	18.3	20.4	26.4	30.8	41.7	48.5	57.8	75.7
SLM 48	48	4.7	5.7	9.1	11.8	14.4	16.5	20.2	21.9	24.5	31.6	36.9	50.0	58.1	69.4	90.8
SLM 71	71	6.9	8.5	13.5	19.5	22.0	23.7	27.1	28.5	32.9	41.8	48.5	62.9	68.0	76.5	86.7
SLM 95	95	9.2	11.4	18.0	26.1	29.4	31.7	36.3	38.1	44.1	55.9	64.8	84.2	91.0	102	116
SLM 119	119	11.6	14.3	22.6	32.7	36.9	39.7	45.5	47.7	55.2	70.0	81.2	105	114	128	145
SLM 142	142	13.8	17.1	27.0	39.0	44.0	47.3	54.3	57.0	65.9	83.5	96.9	126	136	153	173
SLM 166	166	16.1	19.9	31.5	45.6	51.4	55.3	63.5	66.6	77.0	97.6	113	147	159	179	203
SLM 190	190	18.5	22.8	36.1	52.2	58.9	63.3	72.6	76.2	88.1	112	130	168	182	205	232
SLM 238	238	23.1	28.6	45.2	65.4	73.7	79.3	91.0	95.5	110	140	162	211	228	256	291
SLM 285	285	27.7	34.2	54.1	78.3	88.3	95.0	109	114	132	168	194	252	273	307	348
SLM 357	357	34.8	42.9	67.8	98.1	111	119	137	143	166	210	244	315	342	384	435
SLM 426	426	41.4	51.3	81.0	117	132	142	163	171	198	251	291	378	408	459	519
SLM 476	476	46.2	57.2	90.4	131	147	159	182	191	220	280	324	422	456	512	582





## Saft is committed to the highest standards of environmental stewardship.

Implementing this commitment to minimise the impact of its products and operations on the environment means that Saft gives priority to recycled over unrecycled raw materials, reduces its plant releases into the environment year after year, minimizes water usage, and ensures that its customers have recycling solutions for their batteries at the end of their lives.

Regarding industrial Ni-Cd batteries, Saft has had partnerships for many years with collection companies in most EU countries as well as in North America. This collection network receives and dispatches our customers' batteries at the end of their lives to fully approved recycling facilities, in compliance with the Laws governing transboundary waste shipments. Saft offers these services free of charge to its customers.

Please find a list of our collection points on our web site.

In other countries, Saft assists its customers in finding environmentally sound recycling solutions. Please contact your sales representative for further information.

### Africa

Export sales dpt,  
France  
**Tel:** +33 1 49 93 19 18  
**Fax:** +33 1 49 93 19 56

### Argentina

Energia Alcalina,  
Buenos Aires  
**Tel:** +54 11 4334 9034/35  
**Fax:** +54 11 4342 5024

### Australia

Saft Australia Pty Ltd,  
Seven Hills  
**Tel:** +61 2 9674 0700  
**Fax:** +61 2 9620 9990

### Austria

Statron GmbH,  
Wien  
**Tel:** +43 1 617 40 60  
**Fax:** +43 1 617 40 60/40

### Belgium

AEG Belgium SA,  
Brussels  
**Tel:** +32 2 529 6543  
**Fax:** +32 2 529 6449

### Brazil

FSE (Fábrica de Sistemas de Energia) Ltda.,  
Sao Paulo  
**Tel:** +55 11 6100 6304  
**Fax:** +55 11 6100 6338

### Canada

Please contact USA office.

### Chile

Techno Parts Ltda.,  
Santiago  
**Tel:** +56 (2) 249 6060

### China

Saft (Zhuhai Free Trade Zone) Batteries Co Ltd,  
Shanghai  
**Tel:** +86 21 5866 6405  
**Fax:** +86 21 5866 6403

### Czech Republic

Saft Ferak a.s.,  
Prague  
**Tel:** +420 257 013 260  
**Fax:** +420 257 013 261

### Denmark

Scansupply A/S,  
Birkerød  
**Tel:** +45 45 82 50 90  
**Fax:** +45 45 82 54 40

### Finland

HansaBattery Oy,  
Espoo  
**Tel:** +358 9 260 65 292  
**Fax:** +358 9 260 65 299

### France

Division France,  
Bagnole  
**Tel:** +33 1 49 93 19 18  
**Fax:** +33 1 49 93 19 56

### Germany

Saft Batterien GmbH,  
Nürnberg  
**Tel:** +49 911 94 174-0  
**Fax:** +49 911 426 144

### Hong Kong

Saft Ltd,  
Kowloon  
**Tel:** +852 2796 99 32  
**Fax:** +852 2798 06 19

### India sub continent

Export sales dpt,  
Sweden  
**Tel:** +46 491 680 00  
**Fax:** +46 491 681 80

### Italy

Saft Batterie Italia S.r.l.,  
Segrate (Milano)  
**Tel:** +39 02 89 28 07 47  
**Fax:** +39 02 89 28 07 62

### Japan

Sumitomo Corp.,  
Tokyo  
**Tel:** +81 3 5144 9082  
**Fax:** +81 3 5144 9267

### Korea

Energys Korea Co. Ltd,  
Kyunggi-Do  
**Tel:** +82 2501 0033  
**Fax:** +82 2501 0034

### Mexico

Troop y Compania, SA de CV,  
Mexico  
**Tel:** +52 55 50 82 10 30  
**Fax:** +52 55 50 82 10 39

### Middle East

Saft Nife ME Ltd,  
Limassol, Cyprus  
**Tel:** +357 25 820040  
**Fax:** +357 25 748492

### Netherlands

Saft Batteries B.V.,  
Haarlem  
**Tel:** +31 23 750 5720  
**Fax:** +31 23 750 5725

### Norway

Saft AS,  
Osteraas  
**Tel:** +47 6716 4160  
**Fax:** +47 6716 4170

### Russia

ZAO Alcatel,  
Moscow  
**Tel:** +7 095 937 0967  
**Fax:** +7 095 937 0906

### Singapore

Saft Batteries Pte Ltd,  
Singapore  
**Tel:** +65 6512 1500  
**Fax:** +65 6749 7282

### Spain

Saft Baterias S.L.,  
San Sebastian de los Reyes  
**Tel:** +34 916 593 480  
**Fax:** +34 916 593 490

### Sweden

Saft AB,  
Oskarshamn  
**Tel:** +46 491 680 00  
**Fax:** +46 491 681 80

### Switzerland

Statron AG,  
Mägenwil  
**Tel:** +41 62 887 4 887  
**Fax:** +41 62 887 4 888

### United Kingdom

Saft Ltd,  
Harlow  
**Tel:** +44 1279 772 550  
**Fax:** +44 1279 420 909

### USA

Saft America Inc.,  
North Haven (CT)  
**Tel:** +1 203 239 4718  
**Fax:** +1 203 234 7598

### Venezuela

Corporación INTELEC C.A.,  
Caracas  
**Tel:** +58 212 9631122

## Saft

### Industrial Battery Group

12, rue Sadi Carnot  
93170 Bagnole – France  
**Tel:** +33 1 49 93 19 18  
**Fax:** +33 1 49 93 19 64

[www.saftbatteries.com](http://www.saftbatteries.com)

Doc N° 21113-2-0506  
Edition: May 2006

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Photo credits: ©Royalty-Free/Corbis, Digital Vision, PhotoDisc, Saft.

Société anonyme au capital de 31 944 000 €  
RCS Bobigny B 383 703 873

Prepared by Arthur Associates Limited.



**SAFT**